



QA Studio

Installing the LS4278 Symbol Bar Code Scanner

1. Turn off the computer.
2. Plug in the USB cord to the computer and the other in into the scanner stand.
3. Turn on the computer.
4. Run the USB Setup as described below:

LS4278 / USB Setup

- Scan the Set All Defaults (Below)
- Scan the “Pair” barcode (located on the base itself)
- Scan the HID Keyboard Emulation (Below)



SCAN THE PAIR BARCODE ON THE BASE




5. Run the LS4278 Tab Suffix to make the Scanner go to TAB for next item. Scan the following bar codes from top to bottom:




LS4278 / TAB SUFFIX
(Scan these barcodes from top to bottom)


Scan Suffix

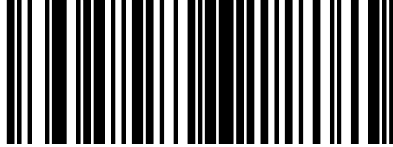


7




0




0




9




Scan options

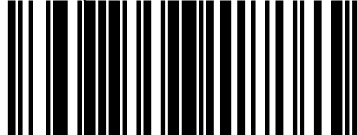

Data suffix

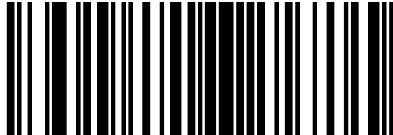

Enter





Setting up LS4278 to read more or less than 14 Characters. (Needed to make the Producer Bar Codes Scan).

After set up of the USB and Tab Set up: Scan the next two bar codes in order (one time).

Enabling I 2 of 5

